




GKA 系列

電動工業滑台

Linear Actuators

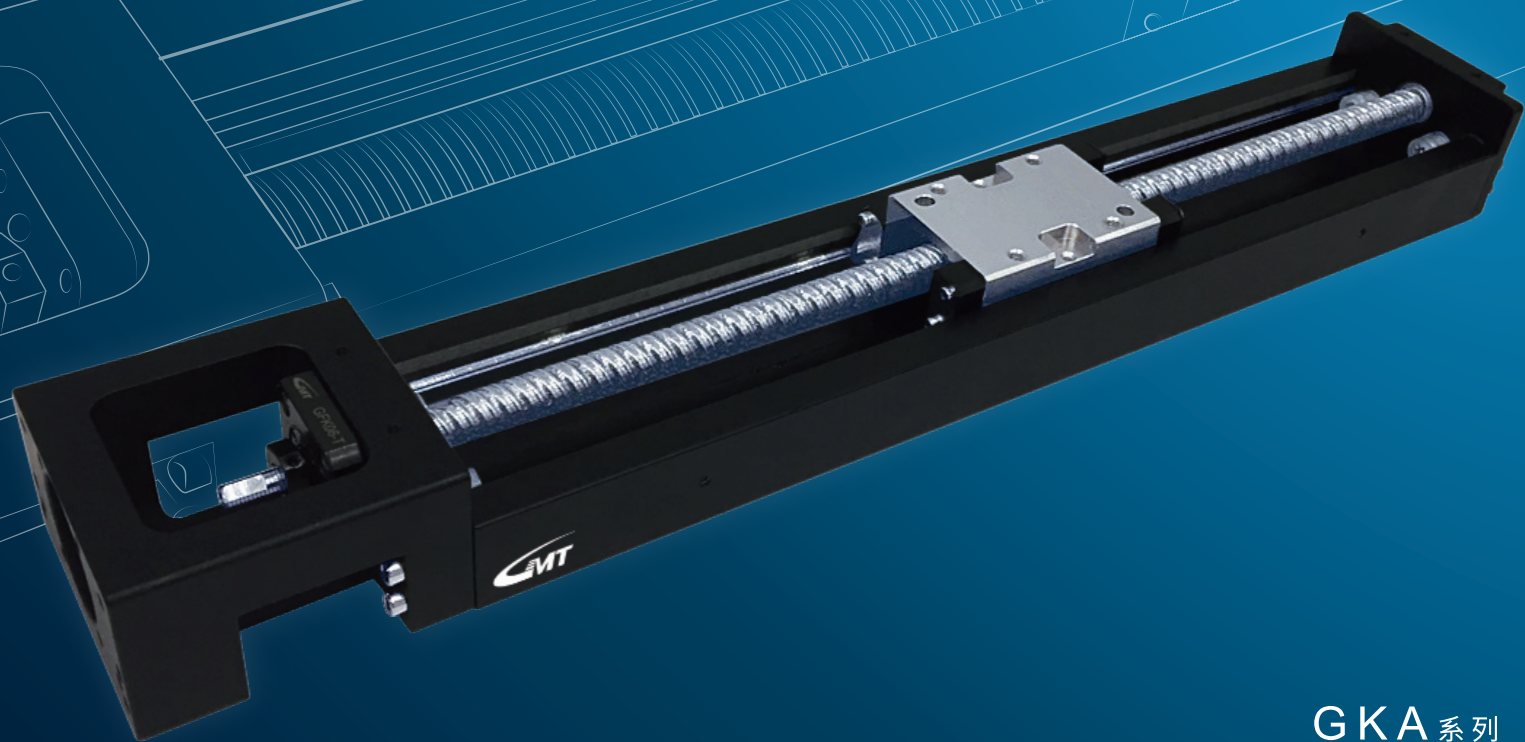

產品特性

1. 軌道方式 - 線性滾珠導引式、哥德式弧型溝槽，構成堅固的滑軌結構。
2. 傳動方式 - 滾珠螺桿其定位精度與壽命較高，具備高速正逆向的傳動及變換傳動等特性。
3. 低組裝設計 - 設計安裝容易。
4. 高剛性設計 - 增加結構剛性。

Features

1. Guiding type - Gothic arch - groove rail with linear ball bearing formed to a strong structure.
2. Ball screw feeding is equipped high and easy changeable transmission, as well as its high precision and life utility feature.
3. Low assembly design - easy to install.
4. High rigidity design from carbon steel material to strengthen structural rigidity.

機械規格 Mechanical specifications	型號 Model NO.		GK□2040			GK□2650				GK□3060					
	尺寸 (高 x 寬) Size (H x W)		20x40 mm			26x50 mm				30x60 mm					
	行程 Stroke		30	80	130	60	110	160	210	50	100	200	300	400	500
	滑塊種類 Block Type		標準滑塊 Standard Block												
	傳動方式 Drive Type		滾珠螺桿 Ball Screw												
	精度等級 Accuracy Level		P: 精密型 / N: 標準型 P: Precision grade / N: Standard												
	導程 Lead		P2: Ø0602 P6: Ø0606			P2: Ø0802 P5: Ø0805				P5: Ø1005 P10: Ø1010					
	防塵蓋 Dustproof Cover		另外選購 Option on request												
	感測器軌道組 Sensor rail		選購 Optional G: SG 感測器軌道組(不含感測器) / P: SP 感測器軌道組(感測器*3) / X: 無感測器軌道組 G: SG With Sensor Rail / P: SP With Sensor Rail and Sensors*3 / X: Not equipped												
	感測器防護鋁金組 Sensor protection cover		選購 Optional S: CS 有感測器防護鋁金組 / X: 無感測器防護鋁金組 S: CS With Sensor Protection Cover / X: Not equipped												
馬達連接板 Motor adapt mounting		選購 Optional H: GK-H / M: GK-M / G: GK-G / X: 無馬達轉接板 H: GK-H / M: GK-M / G: GK-G / X: Not equipped													
聯軸器 Coupling		選購 Optional T: FATCL / C: FACCL / X: 無聯軸器 T: FATCL / C: FACCL / X: Not equipped													
精度規格 Precision specifications	反復定位精度 Repeatability Precision	標準型 Standard	±0.005												
		精密型 Precision	±0.003												
	單向定位精度 Positioning Accuracy	標準型 Standard	-											0.10	
		精密型 Precision	0.02											0.04	
	行走平行度 Movement Parallelism	標準型 Standard	0.025											0.035	
		精密型 Precision	0.01											0.015	
	最大扭力 Max. Torque (N·cm)	標準型 Standard	0.5			1.5				7					
		精密型 Precision	1.2			4				15					



高明鐵企業股份有限公司
GMT GLOBAL INC.

www.gmtglobalinc.com



總公司：

513004台灣彰化縣埔心鄉瑤鳳路一段357號
TEL : +886-4-828-2825
FAX : +886-4-828-2228

秀水業務部
504009台灣彰化縣秀水鄉民主街34巷3號
TEL : +886-4-768-8330
FAX : +886-4-768-8314
E-mail : gmt@gmt.tw

Headquarters

No. 357, Sec. 1, Yaofeng Rd.,
Puxin Township, Changhua 513004, Taiwan
TEL : +886-4-828-2825
FAX: +886-4-828-2228
E-mail: sales@gmt.tw

Xiushui office

No. 3, Lane 34, Minzhu Street,
Xiushui Township, Changhua 504009, Taiwan
TEL: +886-4-7688320
FAX: +886-4-7688314
E-mail: sales@gmt.tw